



FILTRATION

Breathers





Spin-on Breathers

Adaptors and Disposable Breathers

Fluid contamination is the root cause of most hydraulic system failures. Controlling airborne contamination is critical. The synergy of Hy-Pro fluid filter elements and Hy-Pro Spin-on breathers yields clean fluid and a healthy hydraulic system.


PRODUCT SPECIFICATIONS

Media Code	Media Efficiency (Air)
3M	0.3μ absolute
6M	0.6μ absolute
10C	3.0μ absolute
12M	1.0μ absolute
25C	10.0μ absolute
25M	2.5μ absolute
Operating temp.	-20°F (-28°C) to 200°F (93°C)


SPIN-ON BREATHER APPLICATIONS

- Replace ineffective filler / breather caps
- Control contaminant ingress with glass media elements
- High capacity, High efficiency pleated elements extend the life of other filters in the system.


SPIN-ON BREATHER + ADAPTOR ASSEMBLY INSTALLATION DRAWINGS

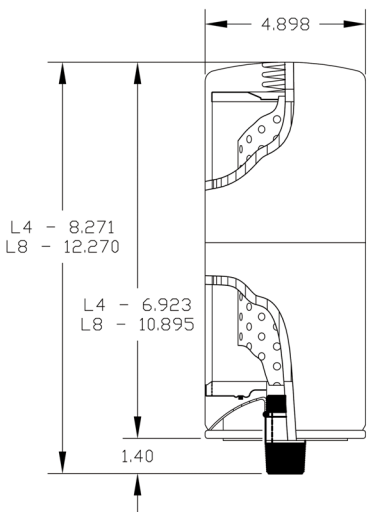


HP75L* -** + ADTB-75

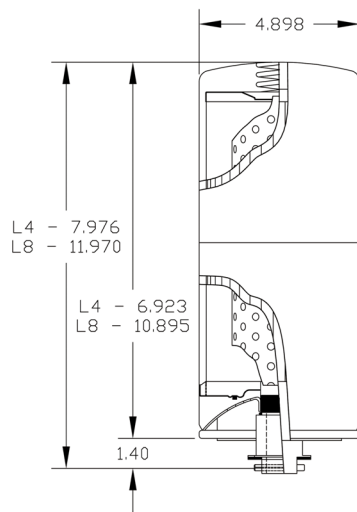

HP75L* -** + ADBB-75

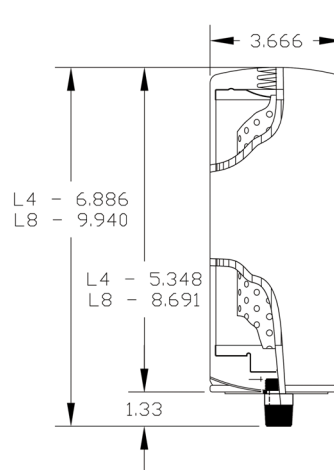

HP76L* -** + ADTB-76

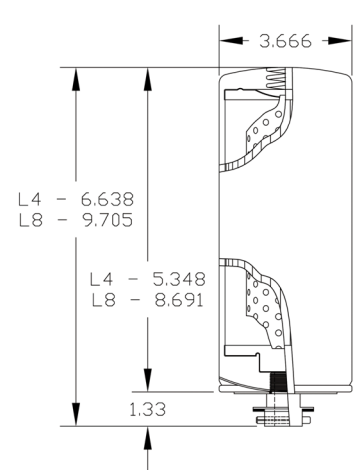



HP76L* -** + ADBB-76



SPIN-ON BREATHER ADAPTOR DIMENSIONS

Spin-on adaptor number	A - IN (mm) Overall length	B - IN (mm) Thread length	C - IN (mm) Element connection	D - IN (mm) Reservoir connection	Seal Material	Case quantity
ADBB-75 (aluminum)	3.00 (76,2)	0.50 (12,7)	1 ½" - 16 UN (HP75** series spin-on)	1.87" pin length 1.40" diameter boss	Buna-Nitrile	1
ADBB-76 (aluminum)	2.00 (50,8)	0.50 (12,7)	1" - 12 UNF-2A (HP76** series spin-on)	1.87" pin length 1.40" diameter boss	Buna-Nitrile	1
ADTB-75 (plated steel)	3.00 (76,2)	0.50 (12,7)	1 ½" - 16 UN (HP75** series spin-on)	1 ¼" NPT	Buna-Nitrile	1
ADTB-76 (plated steel)	2.00 (50,8)	0.50 (12,7)	1" - 12 UNF-2A (HP76** series spin-on)	¾" NPT	Buna-Nitrile	1
ADTB-76V (plated steel)	2.00 (50,8)	0.50 (12,7)	1" or 1 ½" - 12 UNF-2A (HP76** series spin-on)	¾" NPT	Buna-Nitrile	1

**ADTB-75
ADTB-76
ADTB76V**

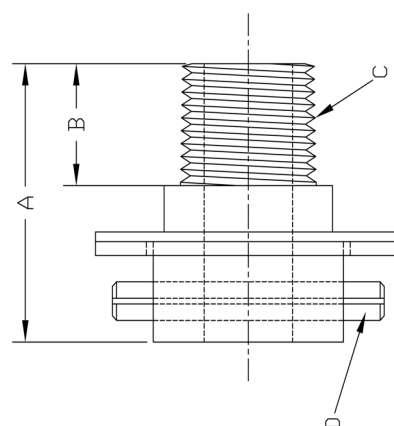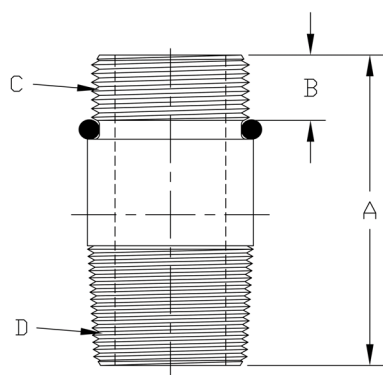

**ADBB-75
ADBB-76**

REPLACEMENT ELEMENT ORDER GUIDE

Table 1 Table 2

HP - - **B**

Table 1	Flow Rate (Spin-On Size)
Code	
75L4	290 gpm, 39 cfm (5.0" OD x 7.0" OAL)
75L8	290 gpm, 39 cfm (5.0" OD x 11.0" OAL)
76L4	212 gpm, 28 cfm (3.75" OD x 5.4" OAL)
76L8	212 gpm, 28 cfm (3.75" OD x 8.7" OAL)

Table 2	Filtration Rating
Code	
1M	0.1 μ absolute air filtration
3M	0.3 μ absolute air filtration
6M	0.6 μ absolute air filtration
12M	1.0 μ absolute air filtration
25M	2.2 μ absolute air filtration



BF Breathers

High Flow Particulate Breathers with coreless glass media element and integral vacuum gage

Fluid contamination is the root cause of most hydraulic system failures. Controlling airborne contamination is critical. The synergy of Hy-Pro fluid filter elements and Hy-Pro Spin-on breathers yields clean fluid and a healthy hydraulic system.

PRODUCT SPECIFICATIONS

Construction Materials	Tube assembly & Shroud:Plated steel
Filtration Efficiency	Element: Synthetic end-caps, handle (element will incinerate at 1100°F) Media code -3M: 0.3μ absolute Media code-6M: 0.6μ absolute Media code-10M: 1.0μ absolute Media code-25M: 2.5μ absolute
Weight	BF25*11, BF30*11 23.5 Lbs, 10.4 kg BF25*17, BF30*17 26.5 Lbs, 12 kg
Temperature	Nitrile: -40°F(-40°C) to 225°F (107°C) Fluorocarbon: -15°F(-26°C) to 275°F(135°C)

SPIN-ON BREATHER APPLICATIONS

- Replace ineffective filler / breather caps
- Control contaminant ingress with glass media elements
- High capacity, High efficiency pleated elements extend the life of other filters in the system.
- Large element surface area yields long life and extends service interval.


Breather Number	Air Flow		
	GPM	CFM	L/min
BF*2511	1450	195	5500
BF*2517	1580	212	6000
BF*3011	2100	280	8000
BF*3017	2375	317	9000



FILTRATION

www.hyprofiltration.com

SPIN-ON BREATHER ADAPTOR DIMENSIONS

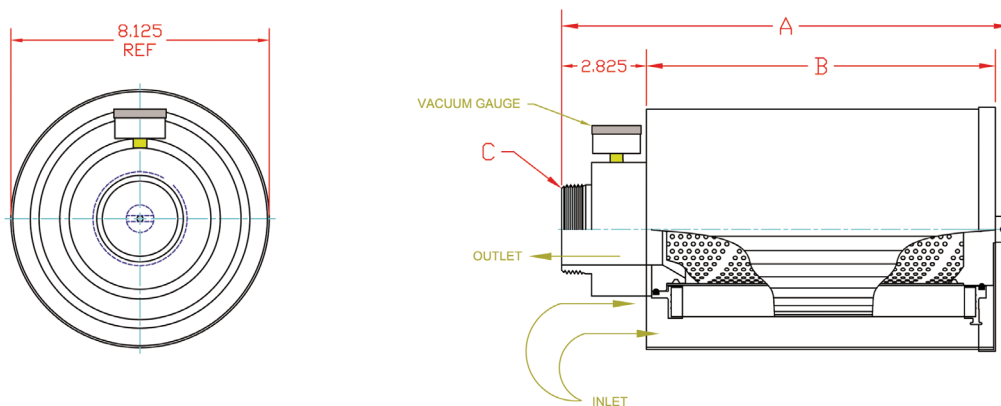

Part Number	A (11 length)	A (17 length)	B (11 length)	B (17 length)	C
A20	16.95 (430)	22.55 (573)	13.64 (347)	19.23 (488)	2" ANSI Flange
A30	16.95 (430)	22.55 (573)	13.64 (347)	19.23 (488)	3" ANSI Flange
B25	14.95 (380)	20.55 (522)	11.64 (296)	17.23 (438)	2.5" Male BSPT
B30	14.95 (380)	20.55 (522)	11.64 (296)	17.23 (438)	3.0" Male BSPT
N25	14.95 (380)	20.55 (522)	11.64 (296)	17.23 (438)	2.5" Male NPT
N30	14.95 (380)	20.55 (522)	11.64 (296)	17.23 (438)	3.0" Male NPT
N15	15.95 (406)	NA	11.64 (296)	NA	1.5" Male NPT

BF BREATHER ASSEMBLY PART NUMBER GUIDE

BF - G

REPLACEMENT FILTER ELEMENT PART NUMBER GUIDE

HPBF30L -

Table 1 Code	Connection
A20*	2" ANSI Flange
A30*	3" ANSI Flange
B25	2.5" Male BSPT
B30	3.0" Male BSPT
N25	2.5" Male NPT
N30	3.0" Male NPT
N15	1.5" Male NPT


Table 2 Code	Element Length
6	~5.500
11	~11.150
17	~16.750

Table 3 Code	Filtration Rating	Media Type
3M	0.3µ absolute	G8 Dualglass
6M	0.6µ absolute	G8 Dualglass
10M	1.0µ absolute	G8 Dualglass
25M	2.5µ absolute	G8 Dualglass

Table 4 Code	Seal Material
B	Nitrile-Buna
V	Fluorocarbon-Viton®

Viton® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

*Contact factory for availability.
Longer lead time.

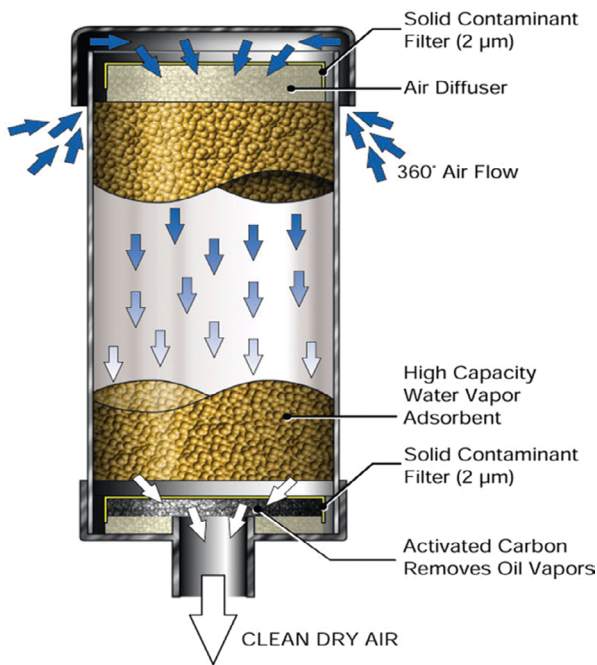

Hy-Dry Breathers

Disposable Air Purifying Breathers

- Fluid contamination is the root cause of most hydraulic system failures.
- Controlling airborne contamination is critical.
- Combine Hy-Dry Breathers with Hy-Pro Filter Elements for complete fluid conditioning.

PRODUCT SPECIFICATIONS

Air flow rate	20 CFM (150 gpm)
Solid contaminant filtration efficiency	2 micron, 100% efficiency (20 CFM)
Chemical resistance	Impervious to alkalis, mineral oils, non-oxidizing acids, salt water, hydrocarbons, and synthetic oils.
HPB-34 (mini)	2.8 fl oz / 0.35 cup water capacity
HPB-100	4.9 fl oz / 0.6 cup water capacity
HPB-101, B-154	8.6 fl oz / 0.6 cup water capacity
HPB-102, B-302	16.56 fl oz / 2.1 cup water capacity
HPBR-102	16.56 fl oz / 2.1 cup water capacity
HPB-103	16.56 fl oz / 2.1 cup water capacity
HPB-108	21.47 fl oz / 2.6 cup water capacity
HPB-109	21.47 fl oz / 2.6 cup water capacity
Operating temp.	-20°F (-28°C) to 200°F (93°C)

Contaminant	Problem	Solution
Water vapor	Rust & oxidation Additive depletion Freezing Increased conductivity Fluid degradation	Water adsorbent silica
Solid particulate	Component wear Stiction Orifice blockage	2 micron removal efficiency 100%
Acids & salts	Chemical reaction Microbial growth Overheating Corrosion	

FEATURES, BENEFITS, ADVANTAGES

Retro-fit existing reservoirs	With adaptors a Hy-Dry breather can be installed on virtually any existing reservoir. (Versatility)
Water adsorption	Eliminate water contamination from reservoir ingress Minimize rust and acid corrosion. Reduce component wear. Reduce maintenance costs. Prolong fluid life. Reduce oil oxidation. Enhance lubricity of fluids.
Chemically inert	Gold silica gel is chemically inert, non toxic, non-deliquescent and non-corrosive. (chemically inert)
Disposable	Materials meet U.S Pharmacopoeia XXI Class VI toxicity requirements. Hy-Dry contains no metal components. (easy disposal)
Color indicator	When maximum adsorption is reached Hy-Dry will turn from Gold to Green as an indicator to replace it. (easy condition indicator)
Bi-directional air flow	Air inhaled is cleaned and dried, and oil is removed from exhausted air .
Activated carbon	As air is exhausted from the tank activated carbon removes oil vapor, fumes, and odors. (clean exhaust)




HY-DRY DISPOSABLE CARTRIDGE ORDER GUIDE

Hy-Dry Number	A	B	C	D	Silica Gel	CFM	GPM	Hy-Dry Connection
HPB-34	3.25" (3.3cm)	3.25" (3.3cm)	N/A	3.25" (3.3cm)	0.8lb (0.4kg)	20	150	½" FNPT
HPB-100	3.5" (9cm)	5.0" (12.8cm)	1.25" (3.2cm)	5.0" (12.8cm)	0.8lb (0.4kg)	20	150	Male 1" scd 40*
HPB-101	5.0" (12.8cm)	5.0" (12.8cm)	1.25" (3.2cm)	5.0" (12.8cm)	1.4lb (0.6kg)	20	150	Male 1" scd 40*
HPB-102	8.0" (20.3cm)	5.0" (12.8cm)	1.25" (3.2cm)	5.0" (12.8cm)	2.6lb (1.2kg)	20	150	Male 1" scd 40*
HPBR-102	9.5" (24.4cm)	5.0" (12.8cm)	N/A	5.2" (13.3cm)	5.0lb (2.3kg)	20	150	1" MNPT
HPB-103	8.0" (20.3cm)	5.0" (12.8cm)	1.25" (3.2cm)	5.0" (12.8cm)	2.6lb (1.2kg)	20	150	1" MNPT
HPB-302	8.0" (20.3cm)	5.0" (12.8cm)	N/A	5.2" (13.3cm)	1.6lb (0.7kg)	20	150	Male 1" scd 40*
HPB-108	10.0" (25.4cm)	5.0" (12.8cm)	1.25" (3.2cm)	5.0" (12.8cm)	3.5lb (1.6kg)	20	150	2" MNPT
HPB-109	14.0" (35.5cm)	5.0" (12.8cm)	1.25" (3.2cm)	5.0" (12.8cm)	5.0lb (2.3kg)	20	150	3" MNPT
HPB-154	5.0" (12.8cm)	5.0" (12.8cm)	1.25" (3.2cm)	5.0" (12.8cm)	1.4lb (0.6kg)	20	150	1" MNPT
HPB-302	8.0" (20.3cm)	5.0" (12.8cm)	N/A	5.2" (13.3cm)	1.6lb (0.7kg)	20	150	Male 1" scd 40*

*scd 40 is slip-on connection (No Threads)

C SERIES BREATHERS HIGH HUMIDITY APPLICATIONS

High humidity applications, such as paper mills and steel mills, need a Hy-Dry desiccant breather even more than a dry environment. The HPBC series breather utilizes dual check valves that control air flow in and out of the reservoir. Air does not enter or leave the reservoir unless the vacuum (0.3 psi, 0.02 bar) or pressure (2.1 psi, 0.15 bar) threshold is exceeded. The check valves prevent air exchange caused by temperature fluctuation with safeguards to protect the integrity of the tank while preventing exhaled air from coming in contact with the desiccant when exhausted (extending useful life). The HPBC-101 & HPBC-102 require an adaptor (see page 4). Assemblies include the element and permanent check valve cap. Upon service unscrew and keep the check valve cap and replace the element with identical part number shown on the element.

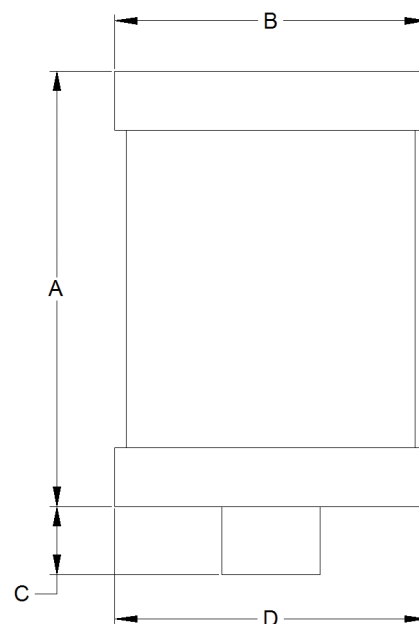


Hy-Dry Number	Check valve psi (bar)	A	B	C	Replacement Element	Silica Gel	CFM (gpm,lpm)	Hy-Dry Stem
HPBC-101	0.3 (0,02) IN 2.1 (0,15) OUT	5.0" (12.8cm)	5.0" (12,8cm)	1.25" (3.2cm)	HPB-341	1.4lb (0.6kg)	20 (150,566)	1" schd 40*
HPBC-102	0.3 (0,02) IN 2.1 (0,15) OUT	8.0" (20cm)	5.0" (12,8cm)	1.25" (3.2cm)	HPB-342	2.7lb (1.2kg)	20 (150,566)	1" schd 40*
HPBC-121	0.3 (0,02) IN 2.1 (0,15) OUT	5.0" (12.8cm)	5.0" (12,8cm)	1.87" (4.7cm)	HPB-343	1.4lb (0.6kg)	20 (150,566)	2" MNPT
HPBC-122	0.3 (0,02) IN 2.1 (0,15) OUT	8.0" (20cm)	5.0" (12.8cm)	1.87" (4.7cm)	HPB-344	2.7lb (1.2kg)	20 (150,566)	2" MNPT

RESERVOIR ADAPTORS

Hy-Dry Adaptor	Type
HPBA-101	Flange (no holes)
HPBA-102	1" Male NPT
HPBA-103	3/4" Male NPT
HPBA-104	Bayonet (standard filler/breather flange)
HPBA-105	1"-12 UNF
HPBA-106	1 1/2"-16 UNF
HPBA-114	Flange (6 holes)
HPBA-201	1 1/8"-16UNF

Adaptors are available to retrofit any reservoir or gearbox to accept the Hy-Dry breather. HPB-100 through HPB-102 will require one of the adaptors displayed below. HPB-108 through HPBR-102 do not require adaptors.

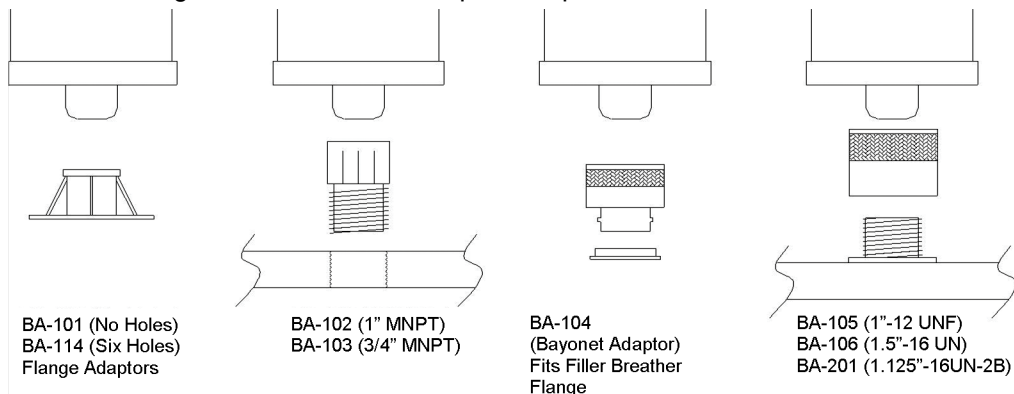

WHEN TO CHANGE THE HY-DRY BREATHER

New Hy-Dry breather silica is gold and as the silica adsorbs water the color will change to green and then to a very dark green as shown on the label located on the Hy-Dry exterior.



HPBR-102 FOR MOBILE AND HEAVY DUTY APPLICATIONS



*HPBR-102 assembly is complete with a metal reinforced base, that remains with the reservoir or gearbox. The replacement breather element (HPB-302) is securely threaded into the base. To service remove the element only (HPB-302) and replace with a new cartridge. The HPBR-102 assembly is recommended for Heavy Duty, Continuous vibration, Mobile, and Extreme climate applications (coal pulverizer gearbox) where a slip fit breather and adapter could become dislodged. HPBR-102 has a 1" Male NPT connection. See page 4 table for dimensional and performance information.

